


NAH 100 L-6 IE3

Abmessungen Drehstrom-Asynchronmotor / dimensions three phase asynchron motor IM B14A (mm)

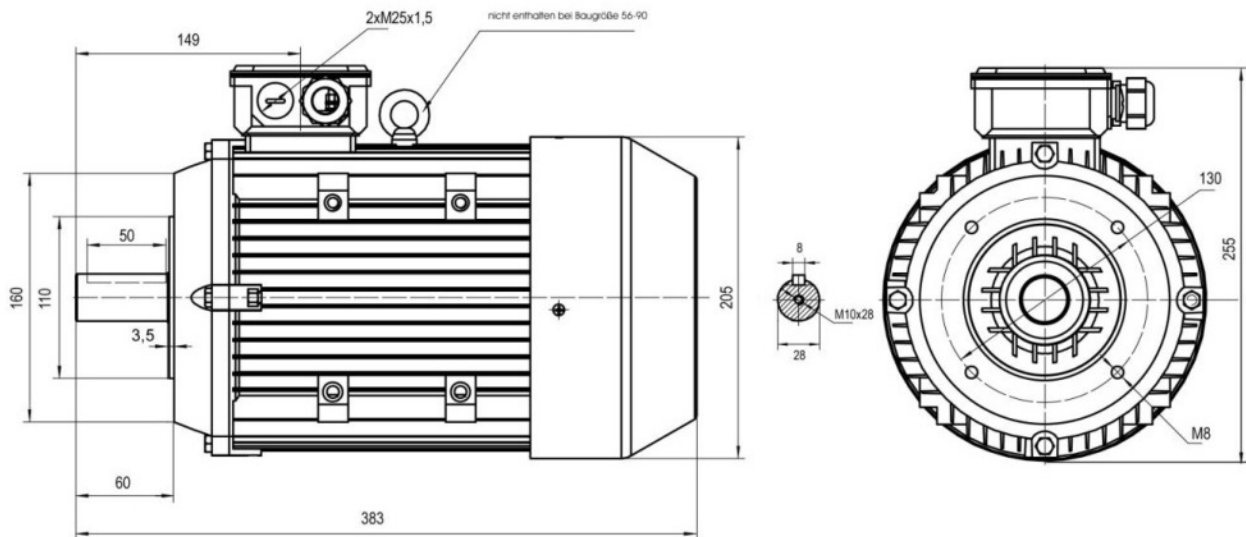

Technische Daten / technical data

Typ / type	NAH	100 L-6 IE3	Nennmoment / rated torque	(Nm)	15,1
Leistung / power	(kW)	1,5	Anlaufstrom-Nennstrom / starting current-rated current	(Ia/In)	5,0
Betriebsart / duty		S1	Anzugsmoment-Nennmoment starting torque-rated torque	(Ma/Mn)	2,3
Nennzahl/ speed (50 Hz)	(min ⁻¹)	950	Kippmoment-Nennmoment Pull-out torque	(Mk/Mn)	3,0
Nennstrom / rated current 400 V	(A)	3,78	Massenträgheitsmoment / moment of inertia	(kgm ²)	0,01438
Spannung / voltage (+/-5%)	(V)	230/400 (Δ/Y)	Umgeb.-temp./ ambient temperature		40°C
Frequenz / frequency	(Hz)	50	Lager / bearing	(DE) (NDE)	6206 ZZ 6206 ZZ
Wirkungsgrad / efficiency	(%)	82,5	Schallpegel / noise level	dB (A)	61
Leistungsfaktor / power factor	(cos φ)	0,69	Gewicht / weight	(kg)	25
Schutzart / protection		IP55			
Isolationsklasse / insulation class		F			

Schaltplan / connection diagram

