


NAH 100 L-6 IE3

Abmessungen Drehstrom-Asynchronmotor / dimensions three phase asynchron motor **IM B34A** (mm)

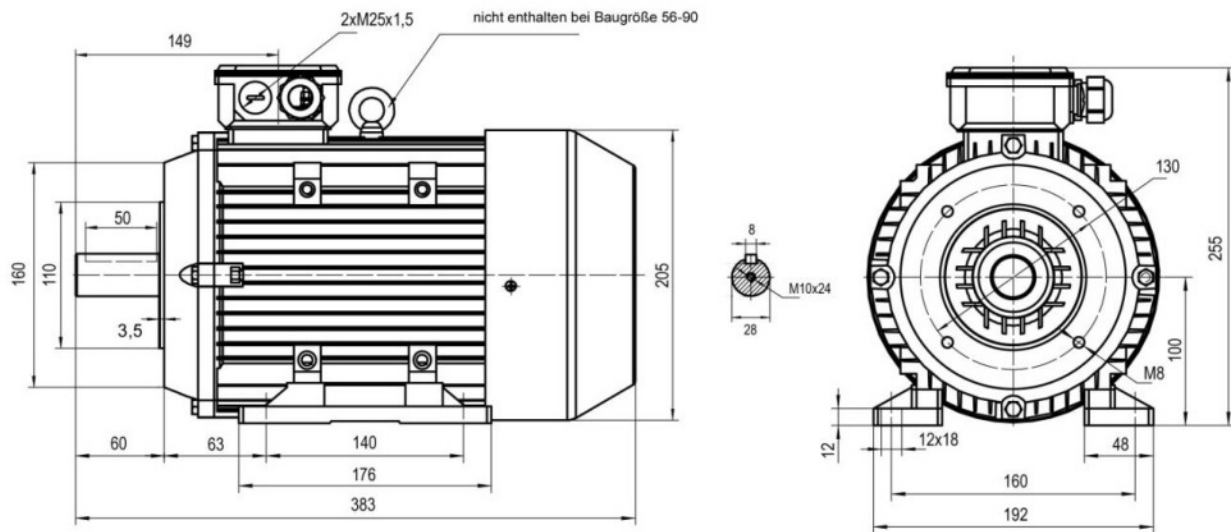

Technische Daten / technical dates

Typ / type	NAH	100 L-6 IE3	Nennmoment / rated torque	(Nm)	15,1
Leistung / power	(kW)	1,5	Anlaufstrom-Nennstrom / starting current-rated current	(I _a /I _n)	5,0
Betriebsart / duty		S1	Anzugsmoment-Nennmoment / starting torque-rated torque	(M _a /M _n)	2,3
Nennzahl/ speed (50 Hz)	(min ⁻¹)	950	Kippmoment-Nennmoment / Pull-out torque	(M _k /M _n)	3,0
Nennstrom / rated current 400 V	(A)	3,78	Massenträgheitsmoment / moment of inertia	(kgm ²)	0,01438
Spannung / voltage (+/-5%)	(V)	230/400 (Δ/Y)	Umgeb.-temp./ ambient temperature		40°C
Frequenz / frequency	(Hz)	50	Lager / bearing	(DE)	6206 ZZ
Wirkungsgrad / efficiency	(%)	82,5		(NDE)	6206 ZZ
Leistungsfaktor / power factor	(cos φ)	0,69	Schallpegel / noise level	dB (A)	61
Schutzart / protection		IP55	Gewicht / weight	(kg)	25
Isolationsklasse / insulation class		F			

Schaltplan / connection diagram

